

STREAMLINE CLOSED CIRCUIT ELECTRIC

Description

The Solahart Streamline closed circuit system is a split system solar water heater with roof mounted slimline collectors and a ground mounted storage tank. It is suitable for use in low to high solar gain areas.

The closed circuit design protects the system from freezing, making it suitable for regions prone to frost. It is also ideal for use in areas with a harsh water supply.

The Streamline closed circuit system offers a choice of either the Solahart Kf or J collector. Both model collectors feature Solahart's revolutionary multi-flow collector panel which uses a huge 35 risers to extract the maximum amount of energy from the sun.

The higher efficiency absorber of the Kf collector with its Black Chrome selective surface maximises the absorption of available solar energy providing even more savings.

The system is equipped with an electric booster element and thermostat which senses when boosting is required to ensure hot water regardless of the weather.



Key Features

- Suitable for frost prone areas or harsh water areas
- Stylish slimline design
- Storage tank can be installed indoors or outdoors
- Solar connections to top of the tank makes for simpler and tidier installation
- Controlled variable flow through solar collectors to maximise solar gain
- Choice of collectors to suit high to low solar gain areas

Key Benefits

- Save 50% to 80% on your water heating energy consumption*
- Hot water regardless of the weather
- Can qualify for valuable environmental incentives*
- Reduced energy use saves up to 3.2 tonnes of CO₂ emissions every year*
- Peace of mind with Solahart's 5/3/1 year warranty[†]
- Space efficient and flexibility with installation

*Savings of 50% - 80% shown are based on Australian Government approved TRNSYS simulation modelling. Savings and incentives will vary depending upon your location, type of Solahart system installed, orientation and inclination of the solar collectors, type of water heater being replaced, hot water consumption and fuel tariff. Maximum financial savings off your hot water bill are achievable when replacing an electric water heater on continuous tariff.

[†]Warranty Details: 5/3/1, 5 year cylinder and collectors, 3 year labour on cylinder, 1 year parts including labour, 1 year labour on collectors; applies to a single family domestic dwelling only. All other applications have a 3/1/1/1, 3 years cylinder, 1 year collectors, 1 year parts, 1 year labour.

Streamline Closed Circuit “DJV” & “DKV” – Electric Boosted Systems

These systems are suitable for frost and harsh water areas.

“DJV” and “DKV” Systems

Model	271	272	273
Tank model	270DBV	270DBV	270DBV
Collector DJV Series	J	J	J
Collector DKV Series	Kf	Kf	Kf
No of collectors	1	2	3

Solar Storage Tank

Tank model	270DBV	
Storage capacity	litres	270
	US gal	71
Installation	outdoor / indoor	
Boost capacity	litres	125
	US gal	33
Weight empty	kg	146
	lbs	322
Weight full	kg	416
	lbs	917

Electric Boost Specifications

Heating unit type [^]	copper sheath immersion element			
Supply voltage	240 Volts (50 Hz)			
Recovery rate @ 240 V and temperature rise of:				
Rating	Current	30°C	40°C	50°C
kW	amps	litres/hr	litres/hr	litres/hr
2.4	10	69	52	41
3.6	15	103	77	62
4.8	20	137	103	83

* Low watts density elements available for hard water areas.

[^] Incoloy elements available for corrosive water areas.

Solar Pipe Work

Max. height				
tank (base) to collectors (top)*	m	9	ft	29
Relief valve setting	kPa	200	psi	29
Solar circuit pipe length	collectors	1 - 2		3
total solar cold + solar hot	m	40	m	30
	ft	131	ft	98
Pipe size	DN15 copper (hard drawn)			
Min grade (fall) in pipe work	1 in 10 (5°)			
Solar pipe connections (at tank)	DN15 compression fitting			

* For heights from 9 m to 18 m, an auxiliary pump kit (299914) is required.

Water Supply

TPR valve setting	kPa	1000	psi	145
ECV* setting	kPa	850	psi	125
Max. supply pressure				
	with ECV	kPa	680	psi
without ECV	kPa	800	psi	115
Water connections	cold	RP¾/20		
	hot	RP¾/20		

* Expansion control valve (ECV) is not supplied.

Collectors


Aperture (heating) area	m ²	1.87	ft ²	20	
Dimensions	length	mm	1937	in	76.3
	width	mm	1022	in	40.3
	height	mm	77	in	3.0
Capacity	litres	3.5	US gal	0.9	
Weight	empty	kg	42	lbs	93
	full	kg	46	lbs	101
Working pressure	kPa	200	psi	30	
Absorber surface Kf	Chromonyx selective surface				
Absorber surface J	Black polyester powder coat				
Absorber material	Steel				
Riser material	Steel				
Number of risers	35				
Tray material	0.7 mm aluminium				
Insulation material – base Kf	38 mm glasswool blanket				
Insulation material – base J	38 mm polyester blanket				
Glass	3.2 mm tempered low iron				

Collector Installation

Roof Area Dimensions		1	2	3
	Length*	m	2.0	2.0
	In	78.8	78.8	78.8
Width*	m	1.2	2.3	3.4
	In	47.2	90.6	133.9
Solar Kits – J & Kf Collectors				
Collector kit – 1 collector	(12104298)	1	0	0
Collector kit – 2 collectors	(12104299)	0	1	1
Collector add on kit	(12104300)	0	0	1

* An additional 0.9m (35.4in) should be left on all four sides of the collector installation for safe access and servicing.

Streamline Electric Boosted

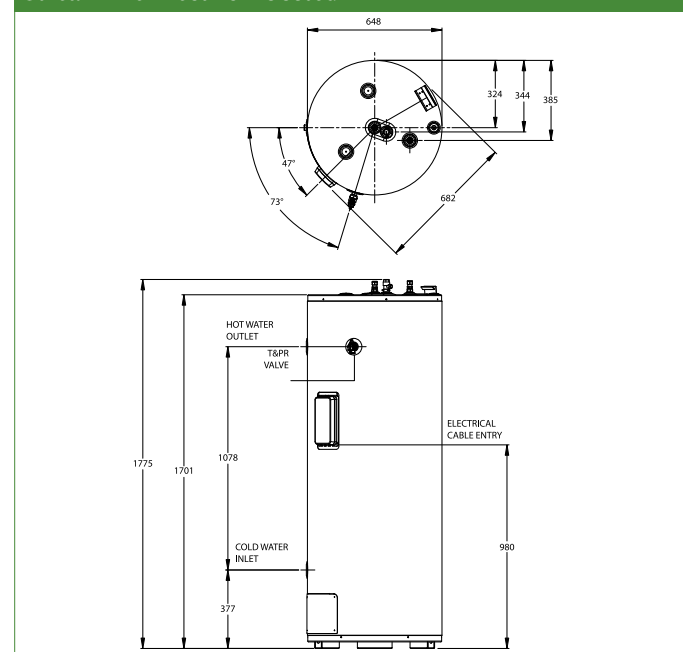

Specifications are subject to change without notice.